


Following the opening of HMP Parc in 1997 additional proposals have been undertaken to provide a women's prison and a Young Offenders Institution.

Some of the special security elements included within the scheme incorporate all accommodation enclosed within a complete concrete envelope with a minimum thickness of 150mm. This includes the floor the ceiling and the inner leaf of the external building perimeter wall. All glazing within the project is either toughened or security glass except where fire-resistant. The external faces of all buildings are a combination of profiled metal sheeting and brickwork with flush windows, offering no possibility of scaling.

HMP Parc has been designed and built to achieve a 60 year lifecycle with concrete, steel and blockwork the majority elements of construction. The external cladding is capable of replacement or upgrading without affecting the principal structure.

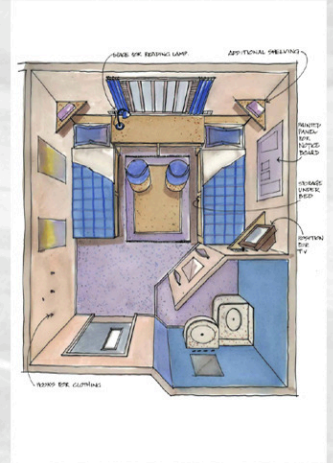

TYPICAL DOUBLE CELL UNIT



CONTROL DESK



VIEW OF OUTSIDE AREA

